


# **DRIFIRE FR Hi-Vis Vented Shirt Class 3**

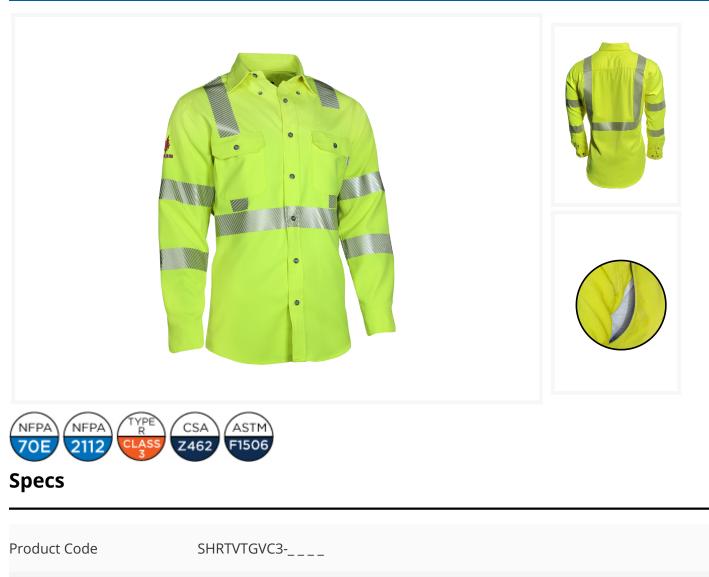

# Compliance

Arc Rating	8.9 cal/cm <sup>2</sup>
CAT Level	CAT 2
ANSI Type / Class	Type R Class 3
Standards	<ul> <li>NFPA 70E</li> <li>NFPA 2112</li> <li>ANSI/ISEA 107 Type R Class 3</li> <li>ASTM F1506</li> <li>CSA Z462</li> <li>OSHA 1910.269</li> </ul>

#### Features

	<ul> <li>DRIFIRE's breathable vent shirts have industry leading comfort</li> <li>FR 3M™ Scotchlite™ Reflective Comfort Trim</li> <li>Premium two needle construction and anti-wrinkle technology in collar, flaps, center front, and cuffs for professional look</li> </ul>		
Features	<ul> <li>Soft, super stretch mesh provides higher comfort and mobility verses others</li> <li>Dual utility ports on flaps for gear (PVD, gas, flashlight)</li> <li>Button down collar and adjustable cuffs</li> <li>Two chest pockets with flaps</li> <li>Inherently flame resistant, FR protection will not wash/wear out</li> </ul>		

### **Product Care**

<ul> <li>READ THE GARMENT LABEL AND LAUNDER PER INSTRUCTIONS ON GARMENT LABEL.</li> <li>DO NOT use bleach or chlorine. DO NOT use fabric softeners or starch.</li> <li>Wash/Laundering Instructions: Dry cleanable. Machine wash warm (Max. 150°F).</li> <li>Wash according to the instructions above to remove any contaminants in order to maintain fabric performance when garment becomes soiled with dirt, greases, oils, etc.</li> <li>If contaminants cannot be removed after laundering, it is best to discontinue use of garment.</li> </ul>	Product Care
---	--------------

## **Sizing Chart**

	TECGEN <sup>®</sup> Vented Shirt (SHRTGV)					
Size	Chest	Center Back	Sleeve Length			
SM	38" - 40"	32.5"	34.5"			
MD	41" - 44"	33"	35"			
LG	45" - 48"	33.5"	36"			
XL	49" - 52"	34"	36.75"			
2X	53" - 56"	34.5"	37.5"			
3X	57" - 60"	35"	37.5"			
4X	61" - 64"	35.5"	37.5"			
5X	65" - 68"	36"	37.5"			

